Premium Unsanded Grout

Gresbond Premium Unsanded Grout is a blend of portland cement, graded aggregates, polymer fortifiers and colour-fast pigments. It is designed for 1 mm to 3 mm joint widths and compatible with a wide range of tile and stone materials including ceramic, vitrified, glass mosaic, granite, marble, engineered stone, terrazzo, and





Unsanded Grout

GRÈSBOND















COLOURS

mium Unsanded Grout has a shelf life of 1 year in dry, unopened

*Refer section under KE-100 Duet for colour list

Coverage Chart

Coverage (in sq. ft.): Approximate sq. ft. coverage per 1 kg unsanded grout.

Tile Size x thickness (in mm)	1 mm	2 mm	3 mm
100 x 100 x 3	143	72	48
150 x 150 x 4	161	81	54
200 x 150 x 5	147	74	49
150 x 300 x 6	143	86	47.8
300 x 300 x 6	215	71.6	71
450 x 300 x 7	220.5	110.4	73.7
600 x 450 x 8	275.5	137.9	92
600 x 600 x 8	321	161	107
600 x 900 x 11	280.4	140.3	107
900 x 900 x 12	321.3	160.8	107.2

Mixing Ratio: Use about 400 ml of water or KGA-01 grout admix per 1 kg of Gresbond Premium Unsanded Grout

KGA-01 **Premium Grout Admix**

Gresbond Premium Grout Admix KGA-01 is a polymer based liquid admixture specially designed for use in combination with Kajaria Grouts. This additive creates a dense, colour-fast grout suitable for indoor & outdoor use. It enhances performances and prevents moisture from seeping behind tiles.











*Premium Grout Admix KGA-01 has a shelf life of 1 year. It is available in a pack size of 400ml (Carton of 10 bottles - 4000ml).

You can reach us at:

NORTH

CHANDIGARHPhones: 0172-4631418, 4631415 E-mail: chandigarh@kajariagres.com

DEHRADUN Mob.: 9760044701

E-mail: dehradun@kajariagres.com JAIPUR:

0141-4910941 2220244 E-mail: jaipur@kajariagres.com

JAMMU

E-mail: jammu@kajariagres.co

Phone: 0161-4649002 E-mail: ludhiana@kajariagres.com

LUCKNOW Phone: 0522-4029181, Mob.: 9837906663 E-mail: lucknow@kajariagres.com VARANASI

E-mail: varanasi@kajarjaares.com

CENTRAL

E: raipur@kajarjagres.com


INDORE (Regional Office)
Phone: 0731-4068839, Mob.: 9752593462
E-mail: indore@kajariagres.com

EAST

PATNA (Regional Office)

KOLKATA (Regional Office)

For Trade Enquiries, please contact: info@gresbondbykajaria.com

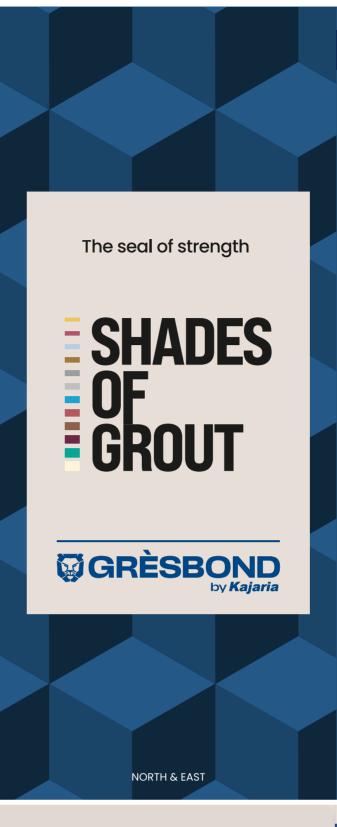

Application Instructions



STEP 1

Ensure adhesive is fully set before grouting. Clean joints of debris and adhesive then fill movement joints with flexible sealant.



STEP 2

Mix parts A and B in a clean vessel until uniform. Slowly add part C (coloured filler powder) for a smooth, slump-free paste. Pour the mixed grout onto the work area immediately.



STEP 3

Using a hard rubber float, press KE-100 Epoxy Grout into joints until fully filled. Work in small sections, removing excess grout continuously. Hold the float diagonally to the grout lines and scrape off excess.



STEP 4

Let joints stiffen for 15-20 minutes. Clean rustic/matte tiles with a grout scrubber and smooth tiles with a damp sponge/cloth. Scrub grout lines in circular, diagonal motions. After 24 hours, clean the surface with soapy water to remove epoxy residues.

Storage and Shelf Life:

12 months when stored in dry condition.

FOR MORE INFORMATION VISIT www.gresbondbykajaria.com

KE-100 DUET

With 2 Components

KE-100 Duet is a high performance epoxy based 2 component tile grout. Easy to use and suitable for all wall and floor tiles, marble and natural stone.























AVAILABLE IN COLOURS

Plain Colours

1KG & 5KG PACK SIZE


CREMA

CHAMPAGNE

LIGHT GREY

AUTUMN YELLOW

ALMONDO



BRICK RED

CHOCOLATE

LAUREL GREEN

AQUA

SEA BLUE

NAVY BLUE

TURQUOISE BLUE

DARK GREY

COFFEE BEAN



1KG & 5KG PACK SIZE

SNOW WHITE

BLACK

KE-100 GLITTER

Glitter effects are specifically designed to enhance both aesthetics and performance. It is suitable for use with ceramic tiles, vitrified tiles, glass mosaic tiles, designer tiles and natural stone.



Combine any of our 18 grout colours with 3 special glitter effects

GOLD



SILVER

COPPER *Shelf Life for all KE-100 Duet Grouts is 1 Year in Dry, Unopened Condition

KE-100 Epoxy Grout

With 3 Components

KE-100 Epoxy Grout is formulated with 3-component epoxy resin, which offers a high degree of resistance to chemicals, abrasion and impact.

KE-100 Epoxy Grout is available in a range of 18 colours. Refer to the section under KE-100 Duet for colour range.



*KE-100 Epoxy Grout has a shelf life of 1 year in a dry, unopened condition. It is available in a 1KG and 5KG Pack.

Coverage Chart

Tile Size X Thickness								
	2 mm	3mm	4 mm	6 mm	8 mm	10 mm	12 mm	
100x100x3	264	177	133	90	68	55	46	
150x150x4	296	198	143	100	75	61	51	
200x150x5	269	181	136	91	69	55	46	
150x300x6	263	175	132	88	66	53	44	
300x300x6	394	263	198	132	100	80	67	
450x300x7	405	270	202	135	101	81	68	
600x450x8	506	337	253	169	127	101	85	
600x600x8	591	394	295	197	148	119	99	
600x900x11	515	343	258	171	129	103	86	
900x900x12	590	393	295	197	148	118	99	

Coverage: Approximate sq. ft. coverage per #1 unit (5KG) of Gresbond.

