


# KE-100 Duet

## With 2 Components


KE-100 Duet is a high performance epoxy based 2 component tile grout. Easy to use and suitable for all wall and floor tiles, marble and natural stone.

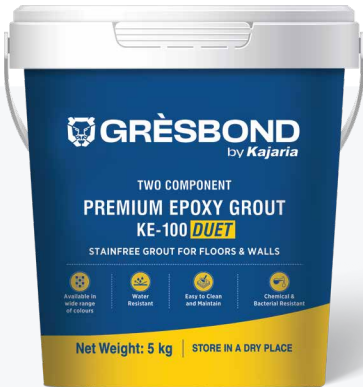


AVAILABLE IN 22 COLOURS

## Premium Colours

1KG & 5KG PACK SIZE



SUPER WHITE



TAUPE



HUSK



SAND



CARDBOARD BROWN




METAL GOLD



TAN BROWN



COCOA



LIGHT GREY



STEEL GREY




DARK GREY



SKY BLUE



PEACH



PINK



TERRA-RED



BLOOD RED



BLUE



DARK GREEN



BURGUNDY



RED BROWN



SHILL BLACK



JET BLACK

## KEY PROPERTIES



Water Resistant



Stain Free



Bacteria Resistant



Fast Curing



Easy to Clean



Hard & Durable


\*Shelf Life for all KE-100 Duet Grouts is 1 Year in Dry, Unopened Condition

# KE-100 Epoxy Grout

## With 3 Components

KE-100 Epoxy Grout is formulated with 3-component epoxy resin, which offers a high degree of resistance to chemicals, abrasion and impact.

KE-100 Epoxy Grout is available in a range of 22 colours. Refer to the section under KE-100 Duet for colour range.

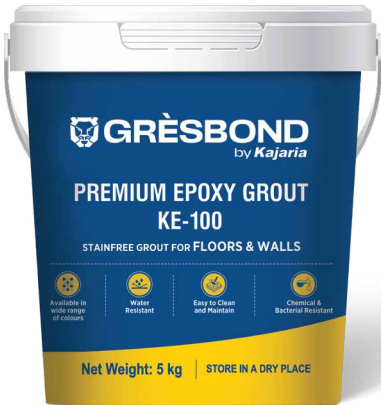

\*KE-100 Epoxy Grout has a shelf life of 1 year in a dry, unopened condition. It is available in a 1KG and 5KG Pack.

## Coverage Chart

Tile Size X Thickness	Joint Width						
	2 mm	3mm	4 mm	6 mm	8 mm	10 mm	12 mm
100x100x3	264	177	133	90	68	55	46
150x150x4	296	198	143	100	75	61	51
200x150x5	269	181	136	91	69	55	46
150x300x6	263	175	132	88	66	53	44
300x300x6	394	263	198	132	100	80	67
450x300x7	405	270	202	135	101	81	68
600x450x8	506	337	253	169	127	101	85
600x600x8	591	394	295	197	148	119	99
600x900x11	515	343	258	171	129	103	86
900x900x12	590	393	295	197	148	118	99

Coverage: Approximate sq. ft. coverage per # 1 unit (5KG) of Gresbond. As per the actual site the consumption vary accordingly. These figures are for indicative purposes.



# Premium Unsanded Grout

Gresbond Premium Unsanded Grout is a blend of portland cement, graded aggregates, polymer fortifiers and colour-fast pigments. It is designed for 1 mm to 3 mm joint widths and compatible with a wide range of tile and stone materials including ceramic, vitrified, glass mosaic, granite, marble, engineered stone, terrazzo, and brick.



AVAILABLE IN ALL 22 COLOURS

\*Refer section under KE-100 Duet for colour list

\*Premium Unsanded Grout has a shelf life of 1 year in dry, unopened pouches. It is available in a 1KG Pack.

## KEY PROPERTIES



Weather Resistant



Smooth Finish



Easy Maintenance



Non Shrinking



Hard and Durable

# Coverage Chart

Coverage (in sq. ft.): Approximate sq. ft. coverage per 1 kg unsanded grout.

Tile Size x thickness (in mm)	1 mm	2 mm	3 mm
100 x 100 x 3	143	72	48
150 x 150 x 4	161	81	54
200 x 150 x 5	147	74	49
150 x 300 x 6	143	86	47.8
300 x 300 x 6	215	71.6	71
450 x 300 x 7	220.5	110.4	73.7
600 x 450 x 8	275.5	137.9	92
600 x 600 x 8	321	161	107
600 x 900 x 11	280.4	140.3	107
900 x 900 x 12	321.3	160.8	107.2

Mixing Ratio: Use about 400 ml of water or KGA-01 grout admix per 1 kg of Gresbond Premium Unsanded Grout.

Kajaria

DISPLAY CENTRES / REGIONAL OFFICES

## WEST

**AHMEDABAD** (Regional Office)  
City Centre-2, Office No-504,  
5th Floor, Nr. Sukan Mall Cross Road,  
Science City Road, Sola, Ahmedabad,  
Gujarat - 380060  
Mob.: 9909904068  
E-mail : ahmedabad@kajariagres.com

**PUNE** :  
201, D S K Gandharva Heights,  
Ganeshkhind Road, Shivaji nagar  
Pune - 411005, Maharashtra  
Phone: 9730088485  
E-mail : pune@kajariagres.com

**MORBI** :  
13-16, 4th Floor, Satyam Commercial  
Complex, Near Malya Fatak Over bridge,  
B-A National Highway,  
Mahendra Nagar, Morbi-363642  
Mob.: 7046689961  
E-mail : morbi@kajariagres.com

**MUMBAI** :  
B1 - 307, Boomerang, Chandivali Farm Road,  
Near Chandivali Studio, Off Saki-vihar Road,  
Andheri (E), Mumbai - 400072  
Phone : 022-69433100  
E-mail : mumbai@kajariagres.com

## SOUTH

**BANGALORE** :  
No. 121 (Old no. 8),  
Opp. Passport Seva Kendra Office,  
Lalbagh Road, Bangalore-560027, Karnataka  
Mob.: 9447083022  
E-mail : bangalore@kajariagres.com

**COIMBATORE** :  
Ground Floor, 57, Cowley Brown Road,  
Near Central Library, R.S.Puram ,  
Coimbatore - 641002, Tamil Nadu  
Phones : 0422-4350801 / 4350803  
E-mail : coimbatore@kajariagres.com

**CHENNAI** :  
Fagun Chambers, Old No: 7,  
New No: 26A/2, 1st Floor, Ethiraj Salai,  
Egmore , Chennai - 600008, Tamil Nadu  
Phones : 044-42691094 / 28264990  
E-mail : chennai@kajariagres.com

**COCHIN** :  
MN Square, Ground Floor, 549/2,  
Near Gold Souk Grande  
NH Bypass, Vyttila, Cochin- 682019, Kerala  
Phones : 0484-2912000  
E-mail : cochin@kajariagres.com

**HYDERABAD** :  
Uma Aishwarya House, H.No 8-2-502/1/AG,  
Road No. 7, Banjara Hills,  
Hyderabad - 500034, Telangana  
Mob.: 9000005392  
E-mail : hyderabad@kajariagres.com

For Trade Enquiries, please contact:

info@gresbondbykajaria.com | www.gresbondbykajaria.com

# Application Instructions



## STEP 1

Ensure adhesive is fully set before grouting. Clean joints of debris and adhesive then fill movement joints with flexible sealant.



## STEP 2

Mix parts A and B in a clean vessel until uniform. Slowly add part C (coloured filler powder) for a smooth, slump-free paste. Pour the mixed grout onto the work area immediately.



## STEP 3

Using a hard rubber float, press KE-100 Epoxy Grout into joints until fully filled. Work in small sections, removing excess grout continuously. Hold the float diagonally to the grout lines and scrape off excess.



## STEP 4

Let joints stiffen for 15-20 minutes. Clean rustic/matte tiles with a grout scrubber and smooth tiles with a damp sponge/cloth. Scrub grout lines in circular, diagonal motions. After 24 hours, clean the surface with soapy water to remove epoxy residues.

Storage and Shelf Life:  
12 months when stored in dry condition.

FOR MORE INFORMATION VISIT  
[www.gresbondbykajaria.com](http://www.gresbondbykajaria.com)

The seal of strength

SHADES  
OF  
GROUT

GRESBOND  
by Kajaria

South & West